PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6:

E04F 15/04

A1

(11) International Publication Number: WO 99/40273

(43) International Publication Date: 12 August 1999 (12.08.99)

(21) International Application Number:

PCT/SE99/00128

(22) International Filing Date:

1 February 1999 (01.02.99)

(30) Priority Data: 9800311-4

4 February 1998 (04.02.98)

SE

(71) Applicant (for all designated States except US): PERSTORP FLOORING AB [SE/SE]; Strandridaregatan 8, S-231 25 Trelleborg (SE).

(72) Inventor; and

(75) Inventor/Applicant (for US only): OLOFSSON, Ola [SE/SE]; Torupsgatan 23, S-231 66 Trelleborg (SE).

(74) Agent: STENBERG, Yngve; Perstorp AB, S-284 80 Perstorp (SE).

(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published

With international search report.


Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.

In English translation (filed in Swedish).

(54) Title: GUIDING MEANS AT A JOINT

(57) Abstract

A guiding means at a joint comprising groove (1) and tenon (2) preferably intended to be joined with glue. The tenon (2) and/or groove (1) includes guiding wedges (3).



FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	· w	Luxembourg	SN	Senegal
ΑŬ	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
ВВ	Barbados	GH	Ghana	MG	Madagascar	T.J.	Tajikistan
BE	Belgium	GN	Guinea	· MK	The former Yugoslav	TM	Turkmenistan
BF	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey
ВG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	15	lceland	MW	Malawi	UŞ	United States of America
CA	Canada	IT	Italy	MX	Mexico	UŻ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Vict Nam
CG -	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
СН	Switzerland	KÇ	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		·
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	ΚZ	Kazakstan	RO	Romania		
CZ	Czech Republic	ιc	Saint Lucia	RU -	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden	•	
EE	Estonia	LR	Liberia	SG	Singapore		

WO 99/40273 PCT/SE99/00128

Guiding means at a joint.

The present invention relates to a guiding means at a joint comprising groove and tenon, preferably intended to be joined with glue.

Prefabricated floorboards which at their edges are provided with groove and tenon are well known nowadays. As these are very easy to install it is possible for the normal handy man to achieve this. These type of floors can be constituted of massive wood, fibre board or particle board. These are often provided with a surface layer, such as lacquer or some sort of laminate. The boards are most often installed by gluing them together via their groove and tenon. It is desired to join the separate boards so closely that the joint becomes practically invisible, which increases the moisture resistance radically. The usable life of the installed floor is hereby also increased. In order to achieve a tight joint, it is essential that glue is used excessively. The clearance in the joint will therefore have to be relatively large in order to be able to force the boards together without having to use special equipment due to the forces that would be needed otherwise. A to small clearance will cause a hydraulic resistance caused by the glued captured inside the groove during the joining. The clearance needed will however cause a random discrepancy in the levels between adjacent floorboards. This discrepancy in levels will lead to an increased wear at the joint and that moisture may penetrate the joint. The decorative wear layer, often constituted by lacquer or laminate will hereby often be worn down closest to the joint. The wood fibre will hereby be naked closest to the joint, which in addition to be being unsightly also may cause the fibres to swell when exposed to moisture. This causes the surface layer to rise closest to the edges whereby these edges will be exposed to further wear, which will decrease the useful life of the floor radically.

It has, through the present invention, quite unexpectedly been possible to solve the above mentioned problems so that the risk for error during installation is radically reduced, whereby the average usable life of the floor, with a guiding means according to the present invention, is considerably increased. Accordingly, the invention relates to a guiding means at a joint comprising groove and tenon preferably intended to be joined with glue. The invention is characterised in that the tenon and/or groove includes guiding wedges. The guiding means preferably forms a part of boards intended to, together form a floor. The core of the boards is constituted by a fibre board or a particle board. At least the upper side of the board is constituted by a decorative thermosetting laminate. The fitting clearance between the tenon and the groove includes a first fitting clearance and a second, guiding, fitting clearance. The second, guiding, fitting clearance is obtained through the guiding

wedges. The first fitting clearance comprises the main part of the fit and the second, guiding fitting clearance comprises a smaller part of the fit. The first fitting clearance is in the range 0.1 - 1 mm, preferably 0.1 - 0.5 mm, while the second, guiding, fitting clearance is in the range 0.01 - 0.2 mm, preferably 0.02 - 0.1 mm.

According to one embodiment of the invention the guiding wedges are arranged perpendicular to the extension of the joint.

According to another embodiment of the invention the guiding wedges are arranged parallel to the extension of the joint.

The surfaces of the joint is provided with recesses so that cavities are formed in the joint. The cavities are intended to receive the glue used during the joining.

The invention is further illustrated together with enclosed figures showing different embodiments of the invention whereby,

- -figure 1 shows, in perspective view, a first embodiment of a guiding means at a joint, according to the invention.
- -figure 2 shows, in perspective view, the embodiment form figure 1 after assembly.
- -figure 3 shows, in perspective view, a second embodiment of a guiding means at a joint, according to the invention.
- -figure 4 shows, in perspective view, a third embodiment of a guiding means at a joint, according to the invention.

Accordingly, figure 1 shows, in perspective view seen from above, a first embodiment of a guiding means at a joint according to the invention. The guiding means comprises groove 1 and tenon 2 which usually is intended to be joined by using glue. The tenon 2 comprises guiding wedges 3 on the upper and lower sides. The fitting clearance between the groove 1 and tenon 2 includes a first and a second, guiding, fitting clearance, which second, guiding, fitting clearance is obtained by the guiding wedges 3. The first fitting clearance forms the main part of the fit while the second, guiding, fitting clearance forms a smaller part of the fit. The first fitting clearance is approximately 0.2 mm while the second, guiding fitting clearance is approximately 0.05 mm. The guiding wedges 3 are arranged parallel to the extension of the joint. The same embodiment is shown assembled in figure 2.

WO 99/40273 PCT/SE99/00128

The respective surfaces of the joint are provided with recesses so that cavities 4 are formed in the joint. The cavities 4 are intended to receive the glue used at the assembly. The guiding means comprises a part of boards intended to, together form a floor whereby the core of the board is constituted by fibre board or a particle board and at least the upper side of the board is constituted by a decorative thermosetting laminate.

Figure 3 shows, in perspective view seen aslant from above, a second embodiment of a guiding means at a joint, according to the invention. The embodiment conforms in the main with the one described in connection to figure 1 and 2. The tenon 2 is, however, provided with guiding wedges arranged perpendicularly to the extension of the joint.

Figure 4 shows, in perspective view seen aslant from above, a third embodiment of a guiding means at a joint, according to the invention. The embodiment is shown assembled. The embodiment corresponds in the main to the one described in connection to figure 1 and 2, the tenon 2 is however provided with guiding wedges 3 only at the lower side.

The invention is not limited by the embodiments shown since these can varied in different ways within the scope of the invention. Guiding wedges 3 can, for example, be arranged inside the groove 1. If these guiding wedges 3 are parallel to the extension of the joint, they are suitably arranged in the bottom of the groove 1 while they can be given a shape similar to the one shown in figure 3 if they are arranged perpendicularly to extension of the joint.

CLAIMS

- 1. A guiding means at a joint comprising groove (1) and tenon (2) preferably intended to be joined with glue c h a r a c t e r i s e d in that the tenon (2) and/or groove (1) includes guiding wedges (3).
- 2. A guiding means according to claim 1 c h a r a c t e r i s e d in that the fitting clearance between the tenon (1) and the groove (2) includes a first fitting clearance and a second, guiding, fitting clearance, which second, guiding, fitting clearance is obtained through the guiding wedges (3), whereby the first fitting clearance comprises the main part of the fit and the second, guiding fitting clearance comprises a smaller part of the fit, that the first fitting clearance is in the range 0.1 1 mm, preferably 0.1 0.5 mm, while the second, guiding, fitting clearance is in the range 0.01 0.2 mm, preferably 0.02 0.1 mm.
- 3. A guiding means according to claim 1 or 2 c h a r a c t e r i s e d in that the guiding wedges (3) are arranged perpendicular to the extension of the joint.
- 4. A guiding means according to claim 1 or 2 c h a r a c t e r i s e d in that the guiding wedges (3) are arranged parallel to the extension of the joint.
- 5. A guiding means according to any of the claims 1 4 c h a r a c t e r i s e d in that the surfaces of the joint is provided with recesses so that cavities (4) are formed in the joint, which cavities (4) are intended to receive the glue used during the joining.
- 6. A guiding means according to any of the claims 1 5 c h a r a c t e r i s e d in that the guiding means forms a part of boards intended to, together form a floor, whereby the core of the boards is constituted by a fibre board or a particle board and that at least the upper side of the board is constituted by a decorative thermosetting laminate.




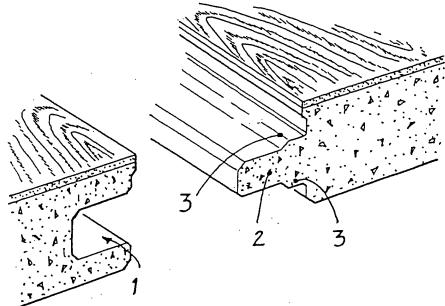


Fig.2



<u>Fig. 3</u>


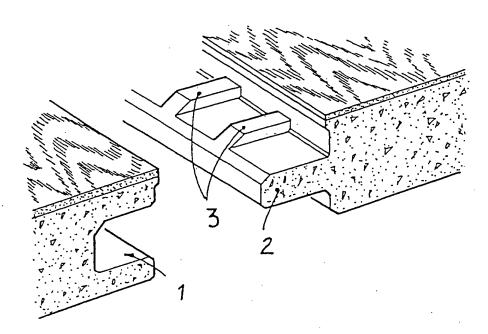


Fig.4



INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 99/00128

		PC1/3L 33/1	00120
A. CLASS	RIFICATION OF SUBJECT MATTER		
TPC6 · F	E04F 15/04		
According to	o International Patent Classification (IPC) or to both a	ational classification and IPC	
B. FIELD	S SEARCHED		
Minimum d	ocumentation scarched (classification system followed b	y elassification symbols) 	
IPC6: E			in the Calle and I
	ion searched other than minimum documentation to the	e extent that such discuments are included	in the fields searched
	I,NO classes as above		h
niectronic d	ata base consulted during the international search (name	e th data base and, where practicable, searc	n terms useu)
WPI, EF	PODOC		
C. DOCU	MENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where ap	propriate, of the relevant passages	Relevant to claim No.
X	US 5165816 A (A.V. PARASIN), 24 (24.11.92)	1,4	
Y			5,6
A			2,3
	 .		
Y	WO 9747834 A1 (UNILIN BEHEER B.) 18 December 1997 (18.12.97)	5,6	
A			1-4
A	US 752694 A (J.G.F. LUND), 23 Fe (23.02.04)	ebruary 1904	1-6
X Furth	er documents are listed in the continuation of Box	C. X See patent family anne.	x.
"A" docume	categories of cited documents In defining the general state of the art which is not considered	Tr later document published after the int date and not in conflict with the appli the principle or theory underlying the	cation but cited to understand
"E" erlier de	particular relevance recument but published on or after the international filing date in which may throw doubts on priority claim(s) or which is establish the publication date of another citation or other	"X" document of particular relevance: the considered novel or cannot be considered when the document is taken alon	ered to involve an inventive
special	reason (as specified) nt-referring to an oral disclosure, use, exhibition or other	document of particular relevance: the considered to involve an inventive accombined with one or more other suc-	p when the document is h documents, such combination
	nt published prior to the international filing date but later than rity date claimed	heing obvious to a person skilled in the "&" document member of the same patent	
Date of the	actual completion of the international search	Date of mailing of the international	search report
17 May	1999	0 6 -06- 1999	
	mailing address of the ISA	Authorized officer	
	Patent Office	3 1 12 12	
	S-102 42 STOCKHOLM No. + 46 8 666 02 86	Johan Winther Telephone No. + 46 8 782 25 00	
, acamine }	10. TU 0 100 04 00	Telephone No. + 46 8 782 25 00	

INTERNATIONAL SEARCH REPORT

International application No.
PCT/SE 99/00128

	ation). DOCUMENTS CONSIDERED TO BE RELEVANT	Relevant to claim No.
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Actievant to claim No.
A	WO 9627721 A1 (PERSTORP FLOORING AB), 12 Sept 1996 (12.09.96)	1-6
	· · · · · · · · · · · · · · · · · · ·	
		,
	·	
		•
		•
. :		

Form PCITISA.210 (continuation of second sheet) (July 1992)

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.
PCT/SE 99/00128

	atent document I in search repo		Publication date		Patent family member(s)	•	Publication date
US	5165816	A	24/11/92	CA GB	2036029 2269875		09/08/92 23/02/94
	9747834	A1	18/12/97	AU BE BE CA CN CZ DE EP NO PL SI	1010487 102230 2226286 1195386	A A A A A A A A A A A A A	07/01/98 02/06/98 06/10/98 30/09/98 18/12/97 07/10/98 12/08/98 14/08/97 27/05/98 10/02/98 22/06/98 31/08/98 09/09/98
JS	752694	A	23/02/04	NON	E		
dO	9627721	A1	12/09/96	AU BR CA CN EP EP JP JP NO SE		A A A A T T	23/09/96 23/06/98 12/09/96 25/03/98 23/04/97 29/12/97 03/03/98 02/02/99 06/11/97 00/00/00